


CB-HFT(YG)(2X)(3X) Yellow/Green Heat-shrinkable Tubing

CB-HFT(YG) is a yellow and green striped heat-shrinkable tubing which is flexible, flame-retardant and resistant to common fluids and solvents. This tubing is commonly used for yellow and green wiring connections and ground marking.

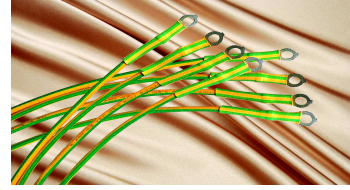

Certificate: UL, CUL, F-mark, Sony Green Partner

Dimensions:

Size	As							ze(cm)
	ID							
φ1.0	1.5±0.2	0.18±0.08	≤0.6	0.36±0.06	200	15	31*31*46	
φ1.5	2.0±0.2	0.20±0.08	≤0.8	0.4±0.06	200	15	46*46*30	
φ2.0	2.5±0.2	0.20±0.08	≤1.00	0.42±0.08	200	15	46*46*45	
φ2.5	3.0±0.2	0.22±0.08	≤1.25	0.42±0.08	200	14	46*46*45	
φ3.0	3.5±0.3	0.25±0.1	≤1.5	0.46±0.08	200	11	46*46*45	
φ3.5	4.0±0.3	0.25±0.1	≤1.75	0.46±0.08	200	9	46*46*45	
φ4.0	4.5±0.3	0.25±0.1	≤2.0	0.48±0.08	200	8	46*46*45	
φ4.5	4.8±0.3	0.25±0.1	≤2.25	0.5±0.1	100	10	46*46*45	
φ5.0	5.5±0.4	0.25±0.1	≤2.5	0.5±0.1	100	10	46*46*45	
φ6.0	6.5±0.4	0.28±0.10	≤3.0	0.56±0.1	100	8	46*46*45	
φ6.5	7.0±0.4	0.28±0.10	≤3.25	0.56±0.1	100	7	46*46*45	
φ7.0	7.5±0.4	0.30±0.10	≤3.5	0.58±0.1	100	15	46*46*36	
φ8.0	8.5±0.5	0.30±0.10	≤4.0	0.6±0.1	100	14	46*46*36	
φ9.0	9.5±0.5	0.30±0.10	≤4.5	0.6±0.1	100	14	46*46*36	
φ10	10.5±0.5	0.30±0.10	≤5.0	0.6±0.1	100	12	46*46*36	
φ11	11.5±0.5	0.30±0.10	≤5.5	0.6±0.1	100	12	46*46*36	
φ12	12.5±0.5	0.30±0.10	≤6.0	0.6±0.1	100	12	46*46*36	
φ13	13.5±0.5	0.36±0.12	≤6.5	0.65±0.12	100	10	46*46*36	
φ14	14.5±0.5	0.36±0.12	≤7.0	0.65±0.12	100	10	46*46*36	
φ15	15.5±0.5	0.36±0.12	≤7.5	0.65±0.12	100	9	46*46*36	
φ16	16.5±0.5	0.36±0.12	≤8.0	0.65±0.12	100	9	46*46*36	
φ17	17.5±0.5	0.36±0.12	≤8.5	0.65±0.12	100	9	46*46*36	
φ18	18.7±0.5	0.4±0.15	≤9.0	0.7±0.12	100	9	46*46*36	
φ20	20.7±0.6	0.4±0.15	≤10.0	0.75±0.15	100	7	46*46*30	
φ22	22.7±0.6	0.4±0.15	≤11.0	0.8±0.15	100	6	46*46*30	
φ25	25.7±0.7	0.40±0.15	≤12.5	0.90±0.15	50	6	46*46*30	
φ28	29±0.7	0.45±0.15	≤14.0	0.95±0.15	50	5	46*46*30	
φ30	31.0±0.7	0.45±0.15	≤15.0	0.95±0.2	50	5	46*46*30	

Technical data and additional size are same as CB-HFT(2X)(3X) type