




CYG-MWT

Medium Wall Heat Shrinkable Tubing Single Wall

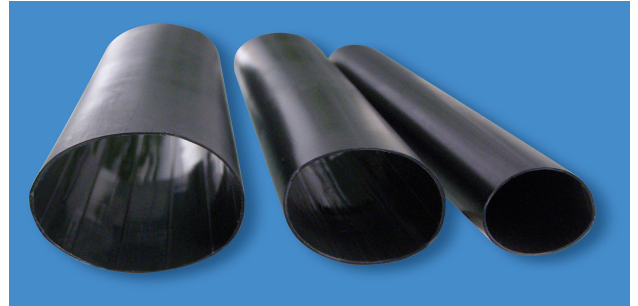

CYG-MWTA

Medium Wall Heat Shrinkable Tubing Adhesive-coated, Dual Wall

Applications

- ◆ Non Flame Retardant
- ◆ Single Wall, 3:1
- ◆ Flat in reel/Oval in piece
- ◆ RoHS Compliant
- ◆ Black & Red Available

Features

- ◆ Excellent insulating abilities
- ◆ Resistant to Impact and abrasion
- ◆ Bigger Shrink Ratio for you easier and faster installation
- ◆ Continuous Working Temperature -55°C to 110°C
- ◆ Convenient and free lengths cutting

Technical Data :

Property	Test Method	Typical Data
Tensile strength	ASTM D2671	≥14MPa
Elongation at break	ASTM D2671	≥400%
Elongation at break after aging	ASTM D2671/150°C, 168hrs	≥300%
Density	ASTM D792	1.05g/cm ³
Eccentricity	ASTM D2671	<30%
Longitudinal shrinkage	UL224	0 to-10%
Dielectric strength	IEC243	≥20KV/mm
Volume resistivity	IEC93	≥10 ¹⁴ Ω.cm
Copper stability	ASTM D2671	Pass

Water absorption	ISO 62/23°C,14 days	<0.15%
------------------	---------------------	--------

Dimensions:

Ordering Ref.	Wall thickness Recovered (mm, Min.)	Shape/ Style	Standard Length (mm)	Ordering Units (Pcs/Carton)	Package Dimensions (cm)
1000-2000mm/pcs available					
CYG-MWTA-8/2	1.7	O	1220	800	36*36*126
CYG-MWTA-12/3	2.0	O	1220	500	36*36*126
CYG-MWTA-16/5	2.2	O	1220	300	36*36*126
CYG-MWTA -22/6	2.5	O	1220	125	36*36*126
CYG-MWTA -28/6	2.5	O	1220	125	36*36*126
CYG-MWTA -33/8	2.7	O	1220	100	36*36*126
CYG-MWTA -40/12	2.7	O	1220	60	36*36*126
CYG-MWTA -55/16	2.7	O	1220	40	36*36*126
CYG-MWTA -65/19	2.8	O	1220	35	36*36*126
CYG-MWTA -75/22	3.0	O	1220	30	36*36*126
CYG-MWTA -85/25	3.0	O	1220	20	36*36*126
CYG-MWTA -95/25	3.0	O	1220	20	36*36*126
CYG-MWTA-115/34	3.0	O	1220	18	36*36*126
1000-1500mm/pcs available					
CYG-MWTA-140/42	3.0	—	1220	16	36*36*126
CYG-MWTA-160/50	3.0	—	1220	14	36*36*126
CYG-MWTA-175/58	3.0	—	1220	14	36*36*126
CYG-MTWA-205/65	3.0	—	1220	12	36*36*126

◆The dimensions of CYG-MWT as same as CYG-MWTA

