


## 18/30(36)KV Heat Shrinkable Indoor/Outdoor Termination

**Usage :**XLPE cable, PILC cable

### Components:

Stress-control tube, Insulating tube, Insulation 3-way breakout, Sealing tube, Rain shed, Phase color tube, Sealing mastic ,Stress-relieving mastic, Filler mastic, Silicon grease, J-30 self-adhesive tape, Cleaning tissue, Copper binding wire, Copper braid, Soldering tin, Soldering unguent, Cotton strap, Gloves, Abrasive strap.

(Oil-resistant tubing, Oil-resistant 3-way breakout, Oil-resistant mastic, Plastic triangle-support Heat shrinkable ring(oil-resistant), F4 tape, Oil-cup, Oil-grease, Metal clip for PILC cable)



### Order Reference:

Type/Order No	Name	Cable range(mm <sup>2</sup> )
18/30(36)KV RSNY/1-1	Indoor termination for 18/30(36)KV XLPE cable(1 core)	25-120
18/30(36)KV RSNY/1-2		150-240
18/30(36)KV RSNY/1-3		300
18/30(36)KV RSWY/1-1	Outdoor termination for 18/30(36)KV XLPE cable(1 core)	25-120
18/30(36)KV RSWY/1-2		150-240
18/30(36)KV RSWY/1-3		300
18/30(36)KV RSNY/3-1	Indoor termination for 18/30(36)KV XLPE cable(3 cores)	25-120
18/30(36)KV RSNY/3-2		150-240
18/30(36)KV RSNWY/3-1	Outdoor termination for 18/30(36)KV XLPE cable(s cores)	25-120
18/30(36)KV RSNWY/3-2		150-240
18/30(36)KV RSNZ/1-1	Indoor termination for 18/30(36)KV PILC cable(1 core)	25-50
18/30(36)KV RSNZ/1-2		70-120
18/30(36)KV RSNZ/1-3		150-240
18/30(36)KV RSWZ/1-1	Outdoor termination for 18/30(36)KV PILC cable(1 core)	25-50
18/30(36)KV RSWZ/1-2		70-120
18/30(36)KV RSWZ/1-3		150-240
18/30(36)KV RSNZ/3-1	Indoor termination for 18/30(36)KV PILC cable(3 cores)	25-50
18/30(36)KV RSNZ/3-2		70-120
18/30(36)KV RSNZ/3-3		150-240
18/30(36)KV RSWZ/3-1	Outdoor termination for 18/30(36)KV PILC cable(3 cores)	25-50
18/30(36)KV RSWZ/3-2		70-120
18/30(36)KV RSWZ/3-3		150-240

Aluminum or Copper Lug, Support insulator, Tee bracket can be supplied as specification.

## 18/30(36)KV Heat Shrinkable Straight Through Joint


**Usage:** XLPE cable, PILC cable

### Components:

Stress-control tube, Inner-insulating tube, Semi conductive/insulation tube, Protective sleeve, Copper screen mesh, Sealing mastic, F4 tape, Stress-relieving mastic, Semi-conducting tape, J-30 self-adhesive tape, Silicon grease, Cleaning tissue, Copper binding wire, Copper braid .

Soldering tin, Soldering unguent, Cotton strap, Gloves, Abrasive strap.

(Oil-resistant tube, Oil-resistant tube, Oil-resistant 3-way breakout, Oil-resistant protective sleeve, Semi-conductive tube Metal case, Ending sleeve, Ending metal jacket, Heat shrinkable ring ,Plastic triangle-support, Oil-resistant mastic, F4 tape, insulation tape, Oil grease for PILC cable)

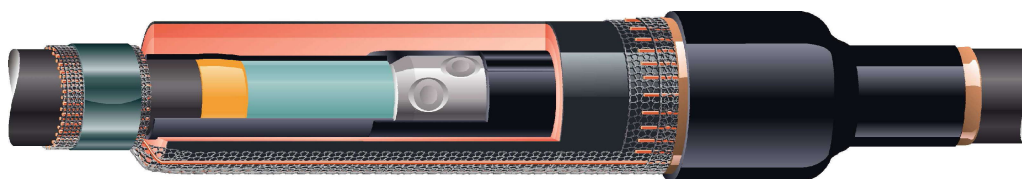

### Order Reference:

Type/Order No	Name	C	Cable range(mm <sup>2</sup> )
18/30(36)KV RSJY/1-1	Straight through joint for 18/30(36)KV XLPE cable (1 core)		50-120
18/30(36)KV RSJY/1-2			150-240
18/30(36)KV RSJY/1-3			300
18/30(36)KV RSJY/3-1	Straight through joint for 18/30(36)KV XLPE cable (3 cores)		50-120
18/30(36)KV RSJY/3-2			150-240
18/30(36)KV RSJZ/1-1	Straight through joint for 18/30(36)KV PILC cable (1 core)		50-120
18/30(36)KV RSJZ/1-2			150-240
18/30(36)KV RSJZ/1-3			300
18/30(36)KV RSJZ/3-1	Straight through joint for 18/30(36)KV PILC cable (3 cores)		50-120
18/30(36)KV RSJZ/3-2			150-240
18/30(36)KV RSJZ/3-3			300

Aluminum or Copper Ferrule and Amour continue components can be supplied as specification